

Installation Instructions:

Kit #: 4-1607

REAR DIFFERENTIAL KIT

MODEL: LX

YEAR: 2006-2001



1-888-PROTHANE  
3560 Cadillac Ave, Costa Mesa, Ca. 92626

PARTS LIST:

- 2 - 69234 UPPER & LOWER FRONT POSITION
- 1 - SLV-60771 SLEEVE .750 X .406 X 1.175
- 1 - 69235 PASS REAR POSITION
- 1 - 69236 DRIVER REAR POSITION
- 2 - SLV-61047 SLEEVE 1.250 X .562 X 1.57
- 2 - WASH-64 WASHER .437 X 2.50 X .095
- 1 - NUT-132 10mm LNUT

\*\*Prothane Motion Control highly recommends that all our polyurethane suspension kits be installed by a qualified technician.\*\*



Please refer to a factory service manual before any disassembly or reassembling of your vehicle for proper instructions. Check service manual to ensure proper torque specs during installation.

NOTES:


Prothane bushings generally do **NOT** meet in the center. The "crush" or amount the bolt can be tightened is determined by the length of the sleeve.

For all articulating bushings, make sure to apply SUPER GREASE (supplied) to **ALL SURFACES** for the bushing that contacts metal. For all stationary bushings we recommend applying a light coat of lithium or teflon grease (not supplied) to OD and ID of bushings to aid installation.

**REUSE** all factory hardware unless replacement pieces are supplied

Front position

Installing this kit you will need to lower the subframe from the car to get to the top bolt in the front position. Replace the stock rubber with the urethane, discard the factory washer/nut and used new hardware supplied.

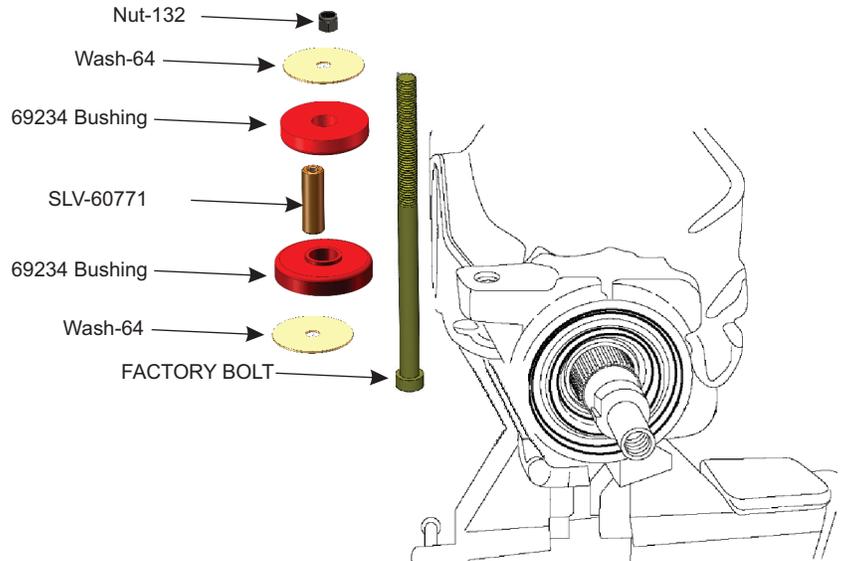

Rear position

With the sub-frame still out you will need to press out the original rubber and steel shell. Once those are out install the new bushings from the inside out. The bushings are identified with the locations on them."Driver & Passenger" once bushings installed press sleeves in and reuse bolt & washer. Re-install the differential and sub-frame

